

MINI CORNICHE collection

MINI CORNICHE collection


item code: DOC_MINICORNICHE

This document is available for
download from our website
www.platek.eu

The data in this document are valid
on the print date indicated above.
Any updates are available
on our website www.platek.eu

MINI CORNICHE collection

walk over
wall recessed
ceiling recessed
applique
full inox
underwater

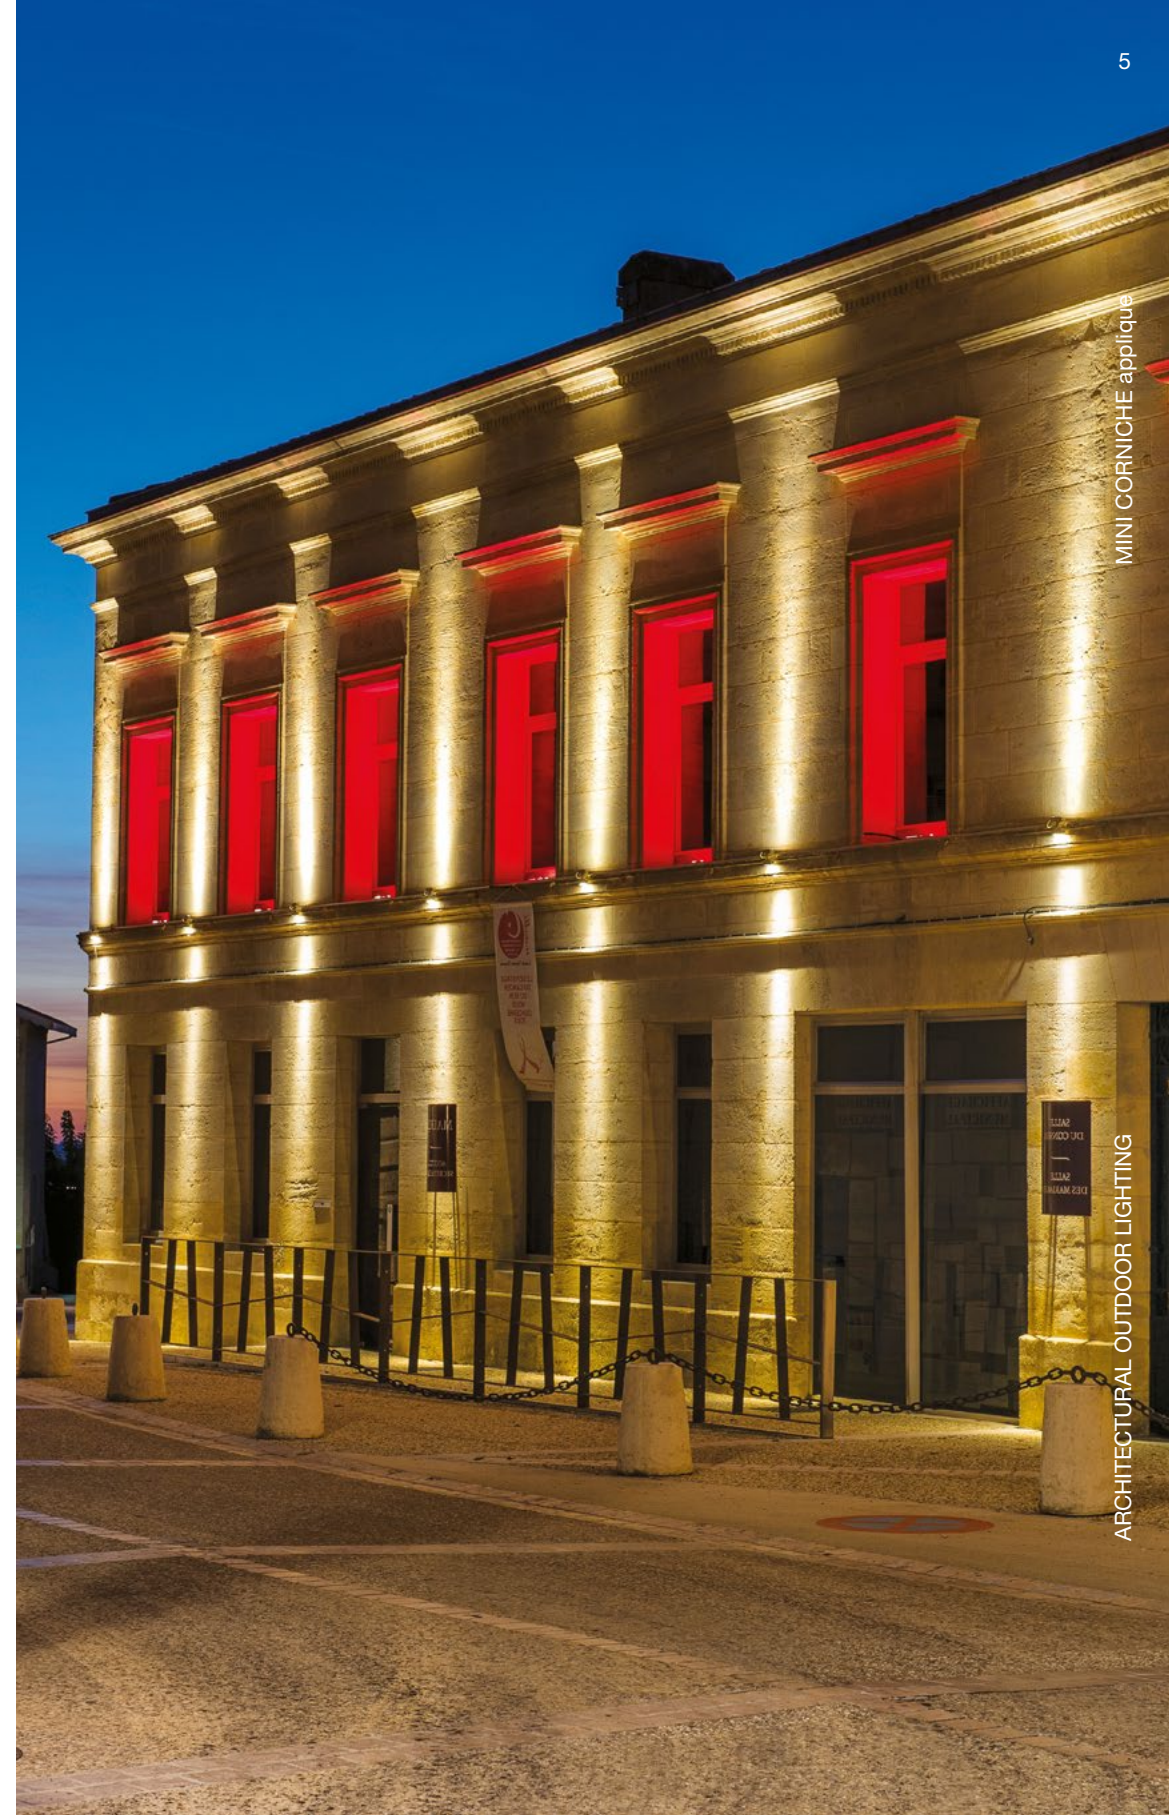



A very wide series of light fittings with linear design and high efficiency. The applications are almost limitless: from the lighting of facades and big walls to the enhancement of monuments or architectures. A lighting system that is flexible and

customizable, available in various sizes and powers. The stainless steel product can operate in immersion and out of water. MINI CORNICHE is developed as recessed walk over fitting or to light the surfaces from below and as a wall light.















ARCHITECTURAL OUTDOOR LIGHTING

ARCHITECTURAL OUTDOOR LIGHTING

MINI CORNICHE walk over






MINI CORNICHE walk over

ARCHITECTURAL OUTDOOR LIGHTING

ARCHITECTURAL OUTDOOR LIGHTING

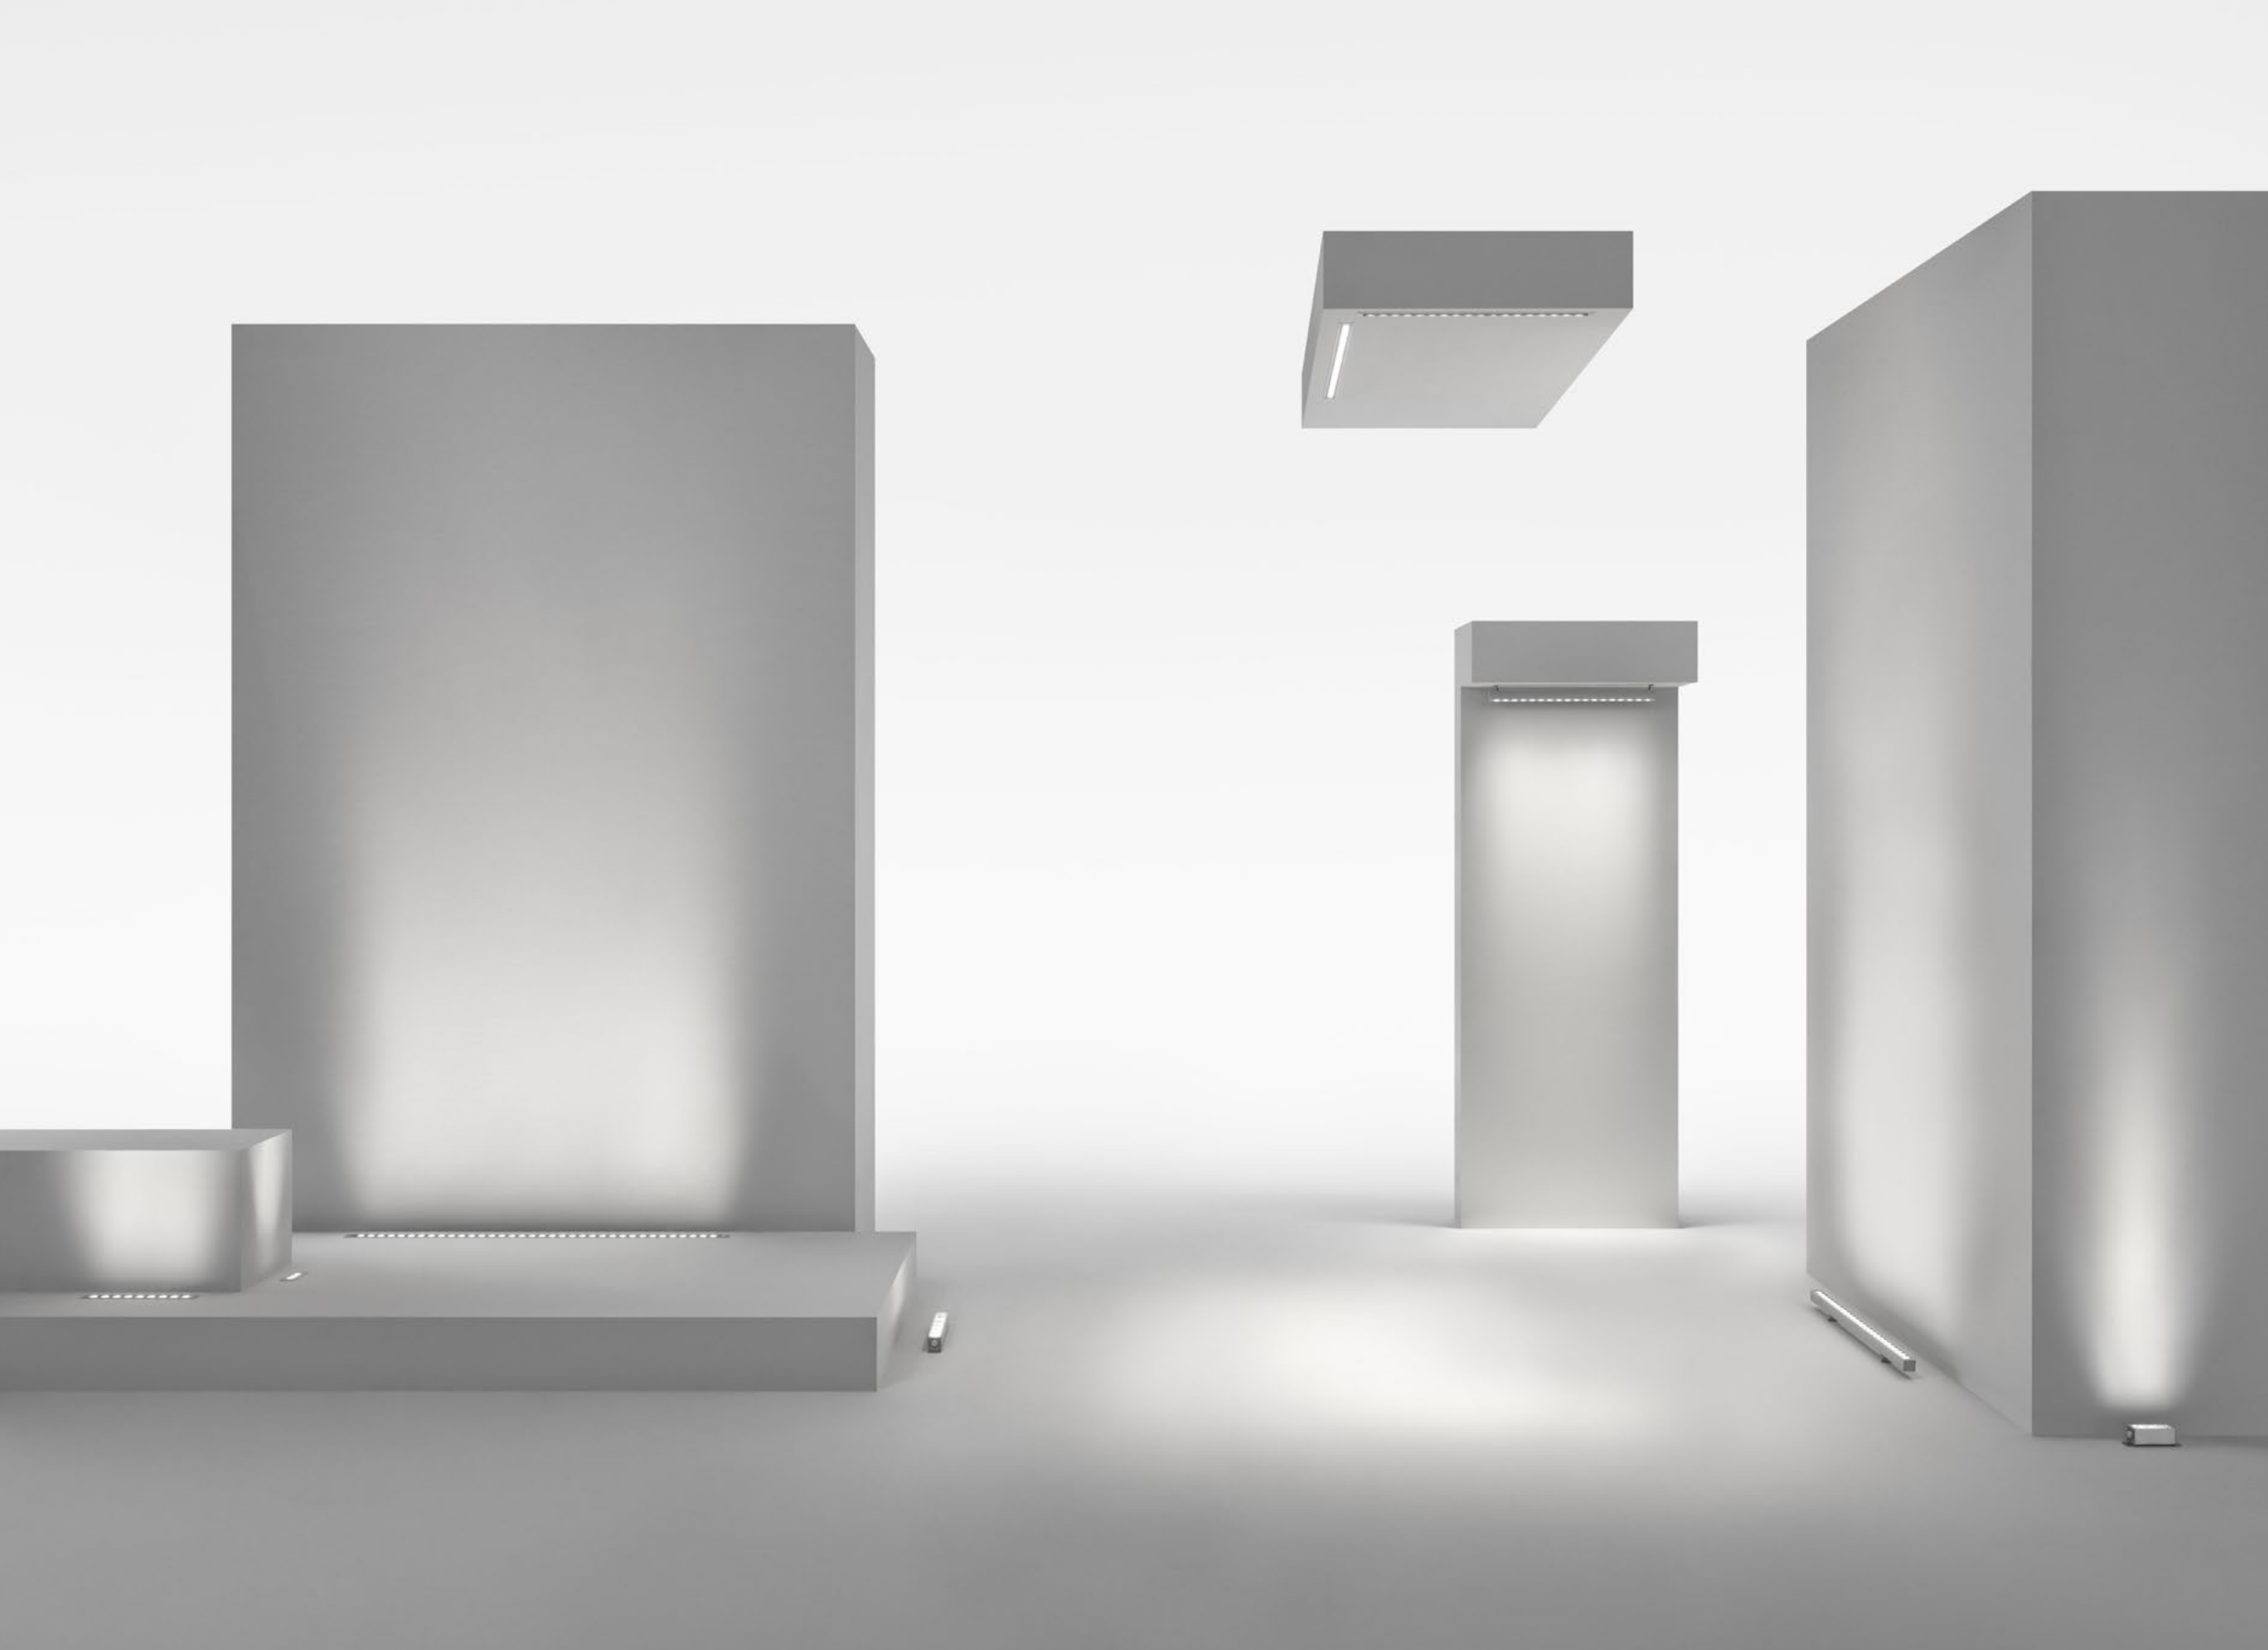

h. 100 mm	
h. 300 mm	
h. 600 mm	
h. 900 mm	
h. 1200 mm	

walk over	IP67 / IK 07
	500 kg
	5 mm extra-clear glass transparent / sandblasted
	2 m cable length

wall recessed	IP67 / IK 07
	5 mm extra-clear glass transparent / sandblasted
	2 m cable length

ceiling recessed	IP65 / IK 07
	5 mm extra-clear glass transparent / sandblasted
	2 m cable length

applique	IP65 / IK 07
	5 mm extra-clear glass transparent / sandblasted
	2 m cable length

standard finishes



.06 grey

on request finishes




.01 black



.07 corten



.09 bronze




.02 white



.08 anthracite

h. 100 mm	
h. 300 mm	

full inox	IP68 Full Dry (2m) / IK 06
underwater	5 mm extra clear glass
	white LED version 5 m cable length
	RGBW LED version 5 m cable length



h. 100 mm
h. 300 mm
h. 600 mm
h. 900 mm
h. 1200 mm

WHITE LED

3000K CRI>80
24V DC

4000K
available on request

→ symmetrical



3,5W - 40W
250 lm - 3000 lm (*)
transparent glass



13° spot
13500 cd/klm

→ symmetrical



3,5W - 40W
260 lm - 3090 lm (*)
transparent glass



26° medium
4270 cd/klm

→ symmetrical



3,5W - 40W
235 lm - 2790 lm (*)
transparent glass



40° large
2030 cd/klm

→ elliptical



3,5W - 40W
215 lm - 2590 lm (*)
transparent glass



51° x 12° elliptical
4115 cd/klm

→ asymmetrical



1,5W - 22W
60 lm - 675 lm (*)
transparent glass



asymmetrical
705 cd/klm

→ diffuse



1,5W - 21W
90 lm - 1650 lm (*)
sandblasted glass



82° diffuse
440 cd/klm

RGBW LED

RGBW (W) CRI>80
500 mA

→ symmetrical



6W - 46W
sandblasted glass
28° medium

→ symmetrical



6W - 46W
sandblasted glass
47° large

→ elliptical



6W - 46W
sandblasted glass
60° x 27° elliptical

(*) Real Data



h. 100 mm
h. 300 mm
h. 600 mm
h. 900 mm
h. 1200 mm

WHITE LED

3000K CRI>80
24V DC

4000K
available on request

→ symmetrical



3,5W - 40W
250 lm - 3000 lm (*)
transparent glass



13° spot
13500 cd/klm

→ symmetrical



3,5W - 40W
260 lm - 3090 lm (*)
transparent glass



26° medium
4270 cd/klm

→ symmetrical



3,5W - 40W
235 lm - 2790 lm (*)
transparent glass



40° large
2030 cd/klm

→ elliptical



3,5W - 40W
215 lm - 2590 lm (*)
transparent glass



51° x 12° elliptical
4115 cd/klm

→ diffuse



1,5W - 21W
90 lm - 1650 lm (*)
sandblasted glass



82° diffuse
440 cd/klm

RGBW LED

RGBW (W) CRI>80
500 mA

→ symmetrical



6W - 46W
sandblasted glass
28° medium

→ symmetrical



6W - 46W
sandblasted glass
47° large

→ elliptical



6W - 46W
sandblasted glass
60° x 27° elliptical



h. 100 mm
h. 300 mm

WHITE LED

3000K CRI>80
24V DC 

4000K
available on request

→ symmetrical



3,5W - 40W
250 lm - 3000 lm (*)
transparent glass

→ symmetrical



3,5W - 40W
260 lm - 3090 lm (*)
transparent glass



13° spot
13500 cd/klm



26° medium
4270 cd/klm

→ elliptical



3,5W - 6,5W
215 lm - 430 lm (*)
transparent glass



51° x 12° elliptical
4115 cd/klm

RGBW LED

RGBW (W) CRI>80
500 mA 

→ symmetrical



6W - 11,5W
sandblasted glass
28° medium

→ symmetrical



6W - 11,5W
sandblasted glass
47° large

→ elliptical



6W - 11,5W
sandblasted glass
60° x 27° elliptical

Platek Srl
Registered Office: Via Paderno, 19
Head Office: Via Marrocco, 4
25050—Rodengo Saiano (BS),
Italy
P.Iva 03320290178
C.F. 03007130176

T +39 030 68 18 201
F +39 030 68 16 567
marketing@platek.eu
www.platek.eu

Art Direction
Gusto IDS
Platek

Graphic design
Gusto IDS
Platek

Photo
Edoardo Delille
Metalli Photo Design
Ottavio Tomasini
Pascal Simonin

© Platek 2021

Platek online
facebook.com/platek
twitter.com/platek
instagram.com/platek
youtube.com/platek
pinterest.it/platek

