

SUN collection

design by
Lundbergdesign

Platek®

SUN collection

item code: DOC_SUN

This document is available for
download from our website
www.platek.eu

The data in this document are valid
on the print date indicated above.
Any updates are available
on our website www.platek.eu

THANKS TO


LUNDBERGDESIGN

SUN collection

design by
Lundbergdesign

Platek®

floodlight / pole mounted

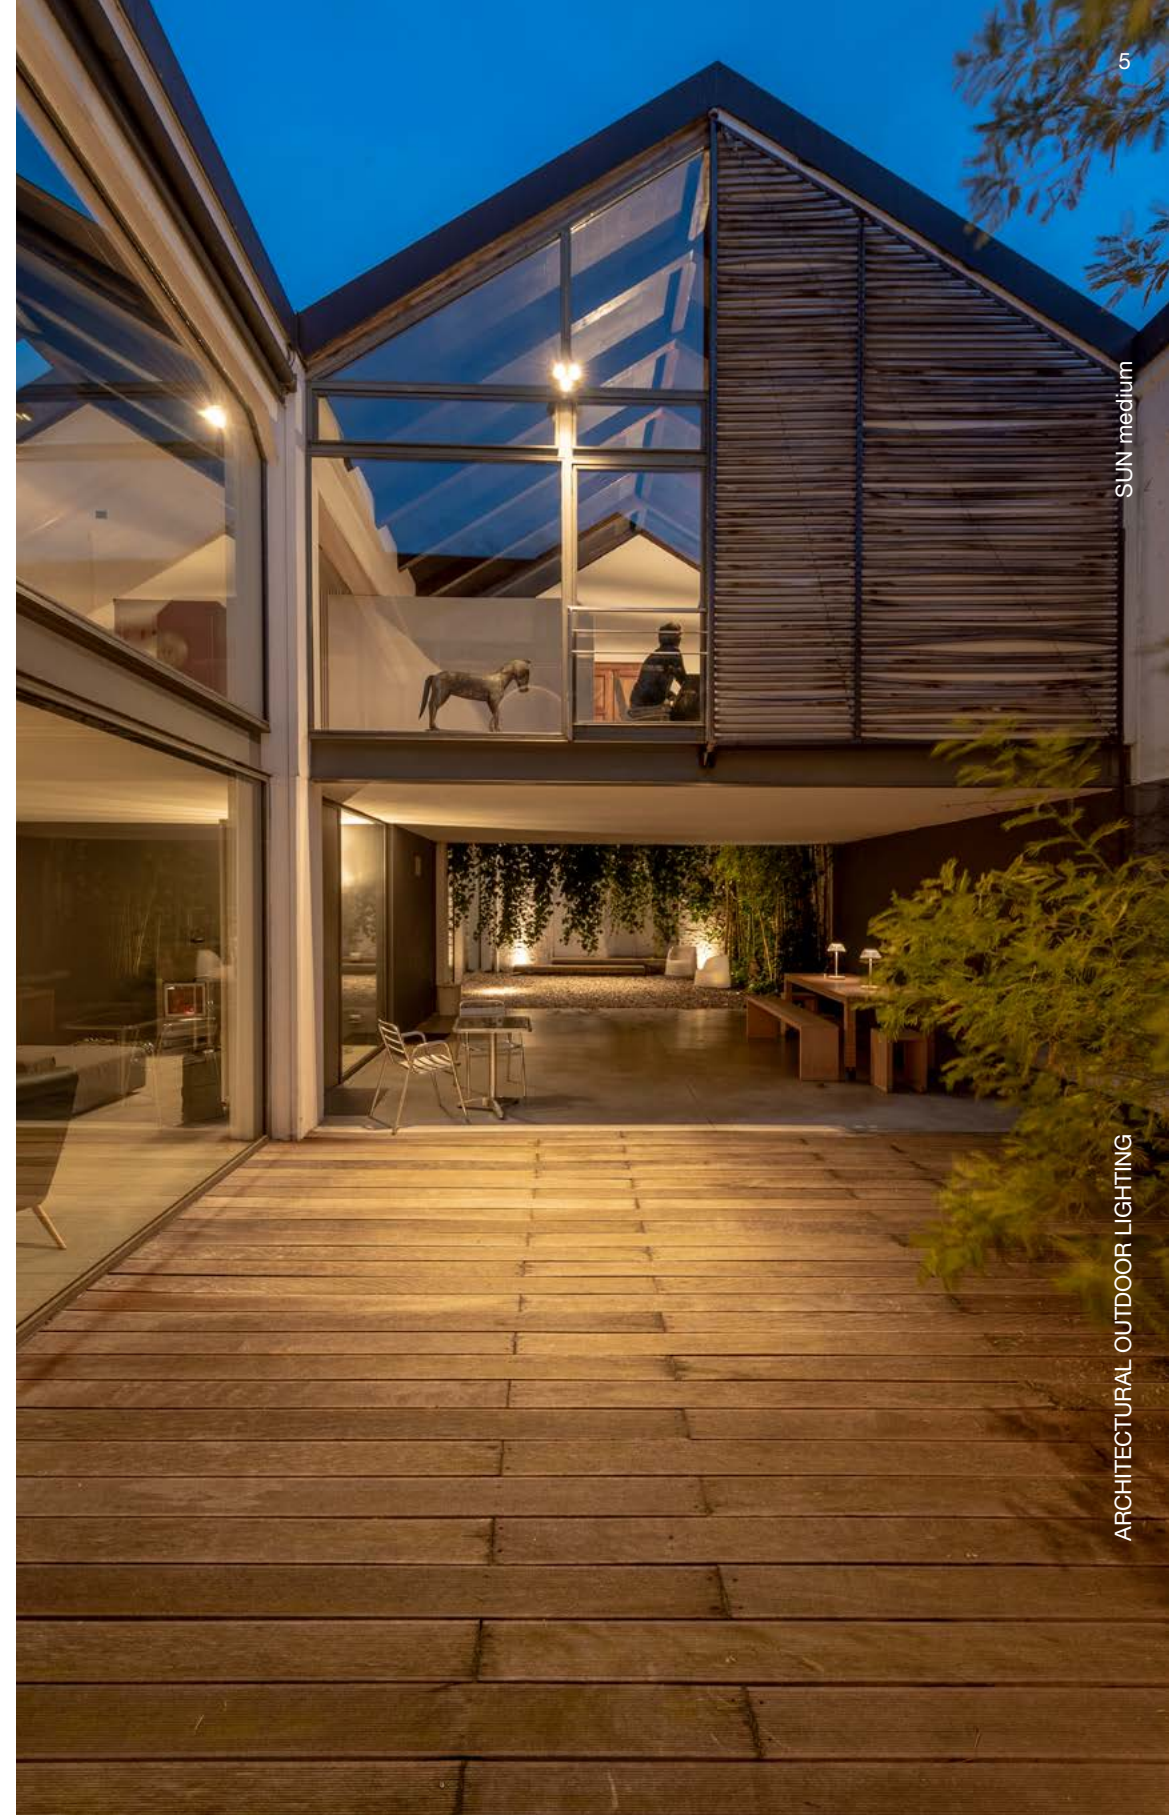




A family of floodlights designed by the Lundbergdesign Studio, in various sizes and wattages, with white or dynamic light, suitable for meeting any outdoor lighting design requirement. The design is strictly technical in feel, with decidedly captivating

aspects. Form and function are clearly identified and come together perfectly in the defined changes of surface finish and materials. Of particular note: the technological equipment is designed to show off the optics to best effect.








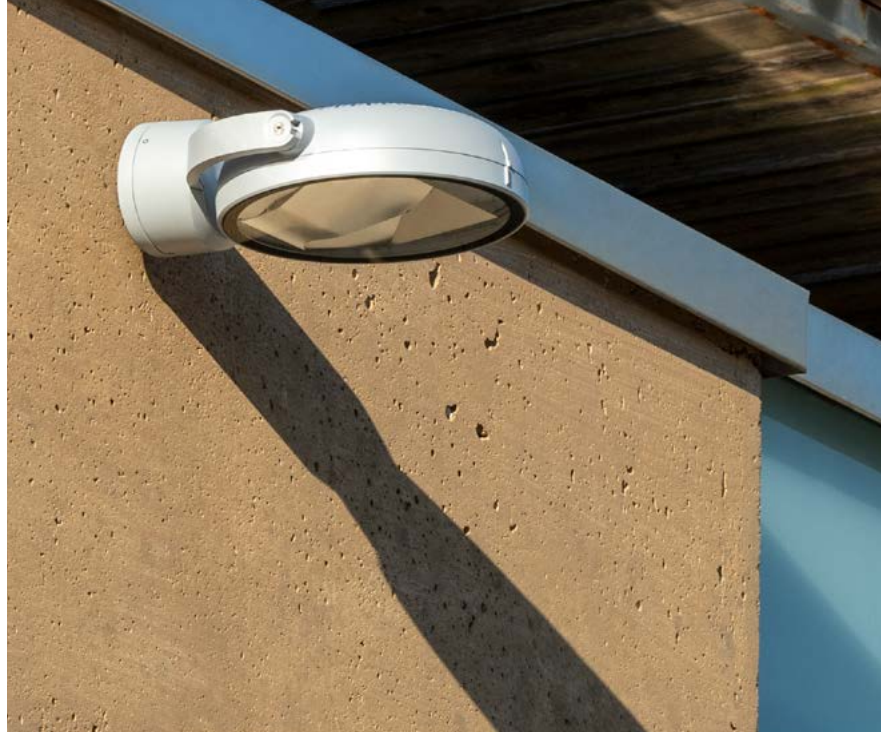





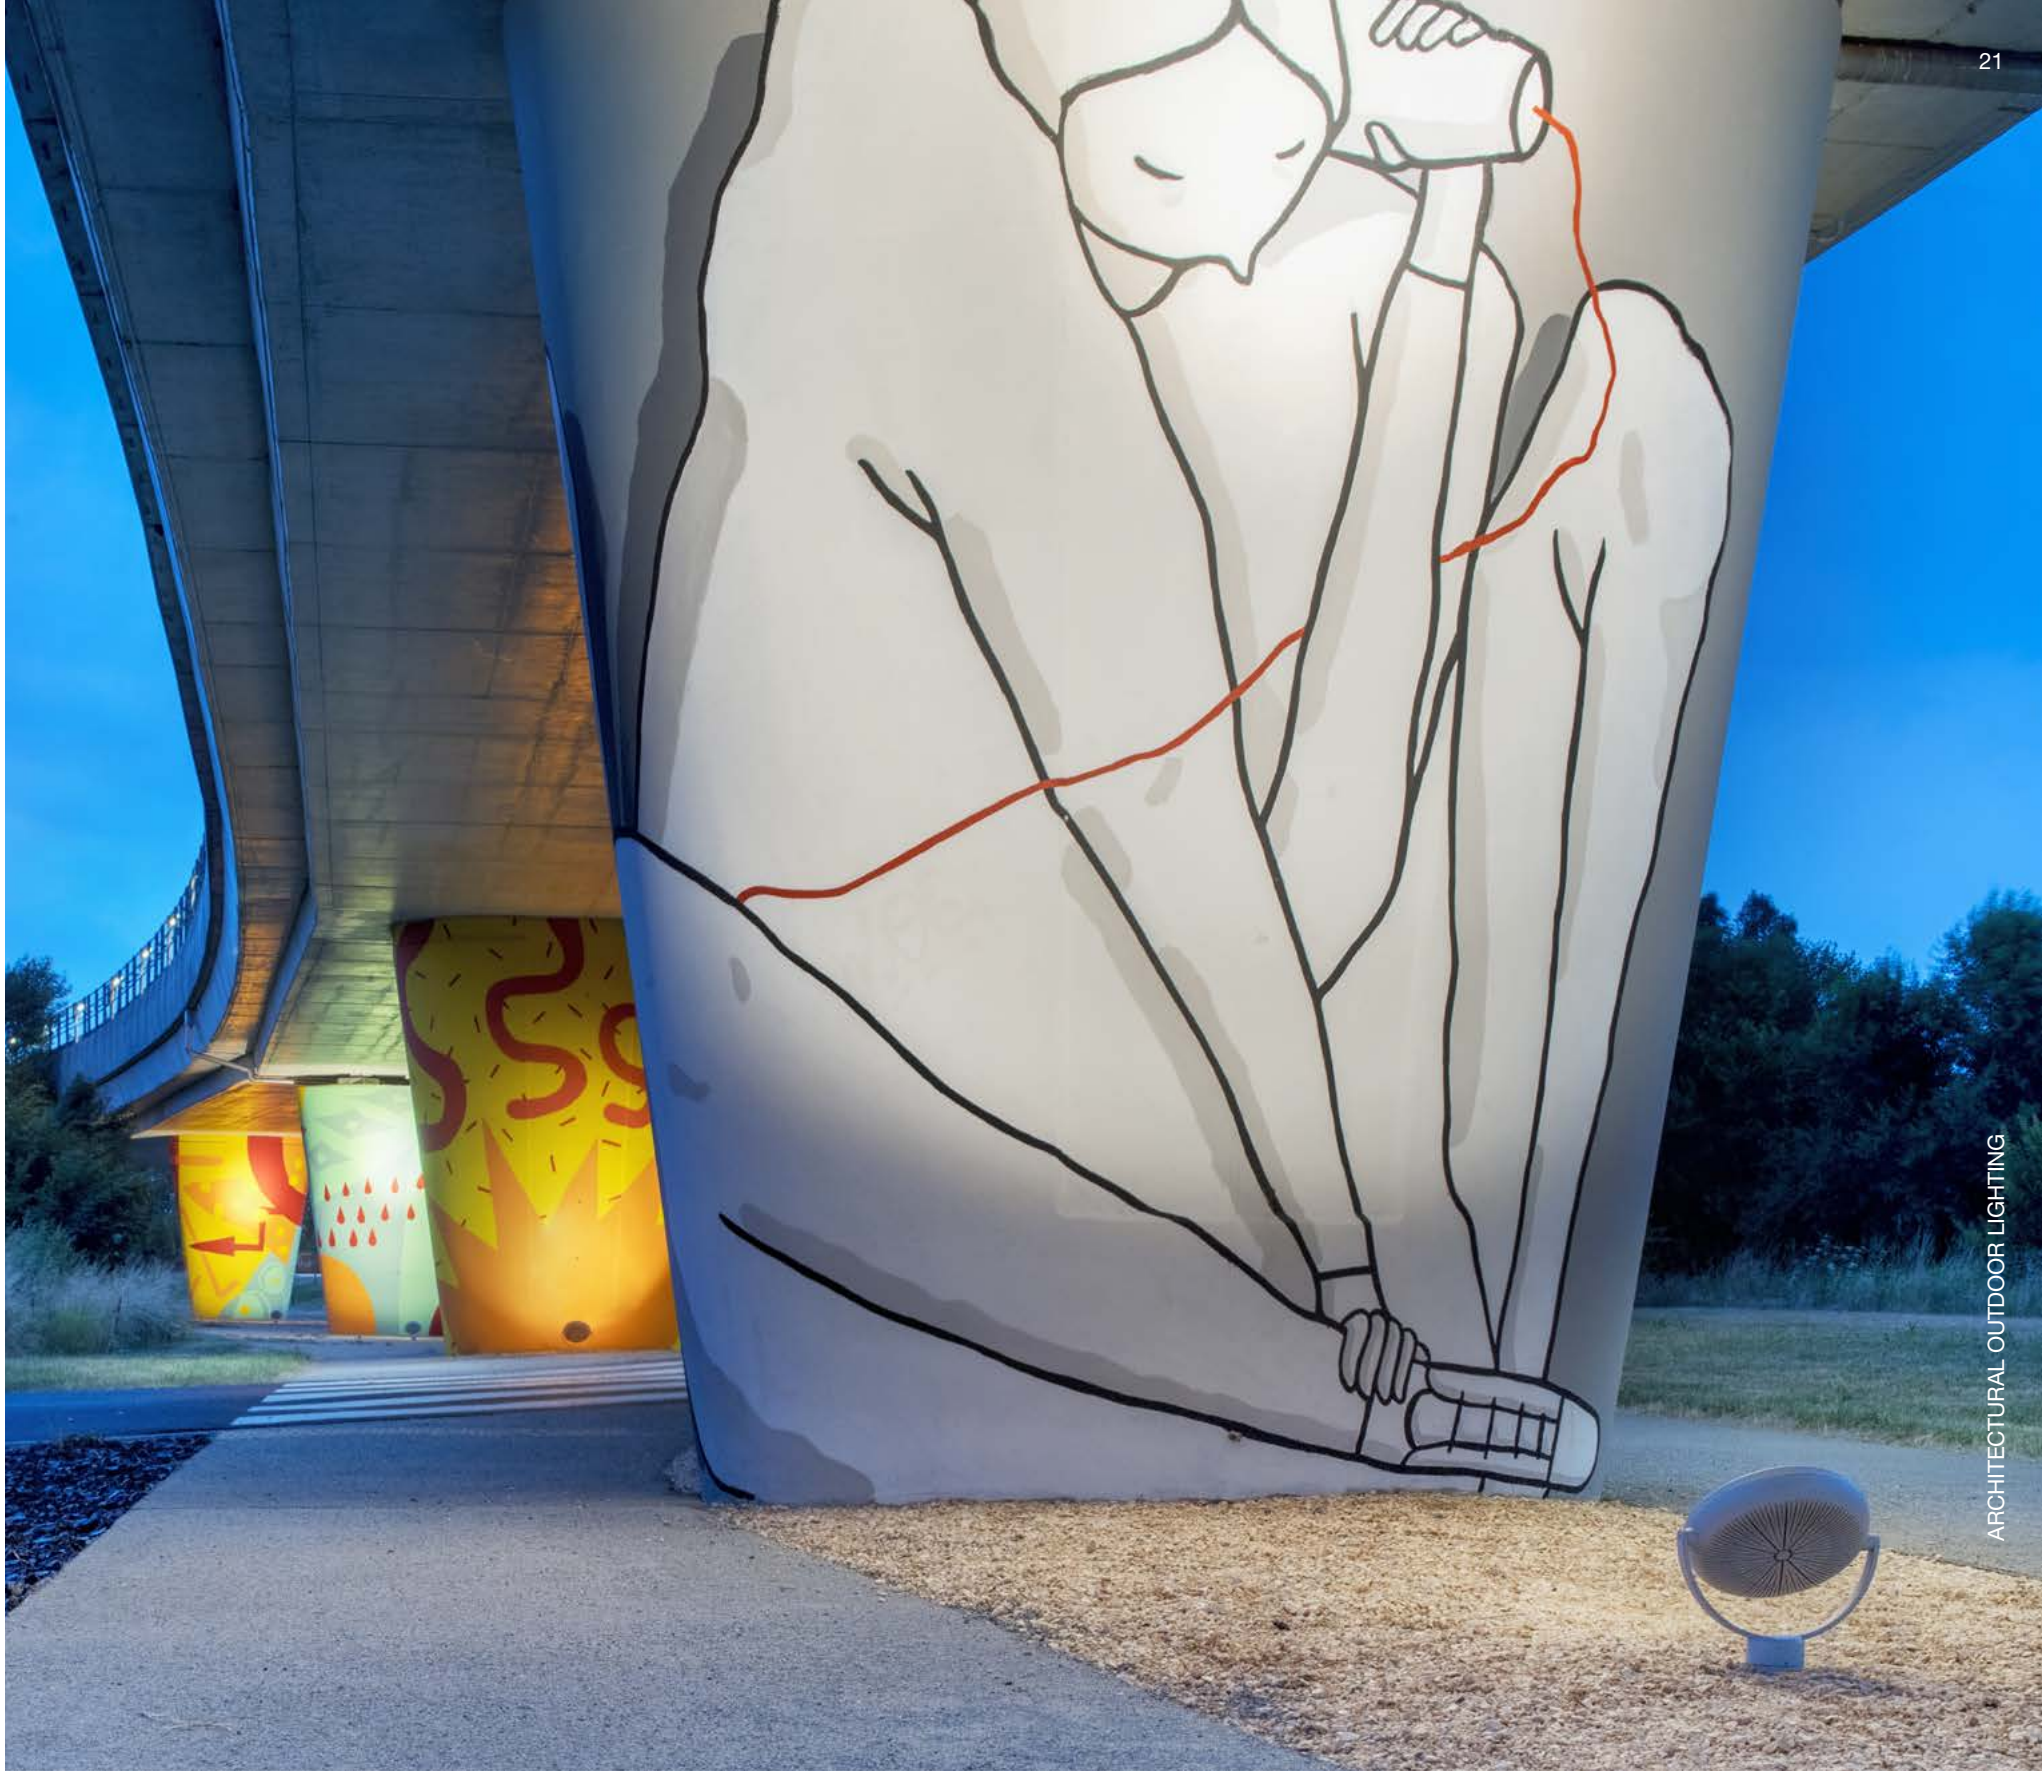









SUN small
floodlight / on pole

IP66
IK 09


200 x h. 230 mm



SUN medium
floodlight / on pole

IP66
IK 09


270 x h. 300 mm

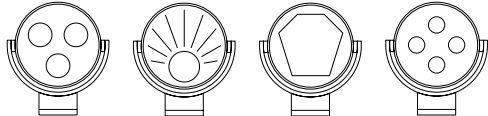

SUN large
floodlight / on pole

IP66
IK 09

370 x h. 400 mm

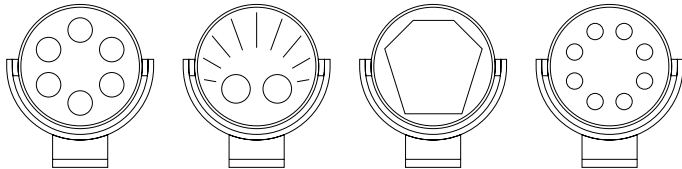

standard finishes



.06 grey



.08 anthracite


on request finishes



.01 black



.07 corten



.02 white



.09 bronze

SUN small
floodlight / floodlight on pole

WHITE COB LED

→ symmetrical

3000K CRI>80
220-240V 0/50/60Hz ⊕



27W | 1070 lm (*)
spot 14°



27W | 1890 lm (*)
medium 26°

2200K / 2700K / 4000K
available on request



27W | 1970 lm (*)
large 60°

DALI dimmable

RGBW LED

→ symmetrical

max. 900mA ⬠
4 channels +
1 channel NTC



20W
spot 24°



20W
medium 40°



20W
large 70°

(*) Real Data

SUN medium
floodlight / floodlight on pole

WHITE COB LED

→ symmetrical

3000K CRI>80
220-240V 0/50/60Hz ⊕



40W | 2070 lm (*)
spot 14°



40W | 3640 lm (*)
medium 26°

2200K / 2700K / 4000K
available on request



40W | 3800 lm (*)
large 60°

DALI dimmable

→ asymmetrical

→ street optic



34W | 2630 lm (*)
93° x 61°



38W | 3345 lm (*)
150° x 55°

RGBW LED

→ symmetrical

max. 900mA ⬡
4 channels +
1 channel NTC



40W
spot 24°



40W
medium 40°



40W
large 70°

(*) Real Data

SUN large
floodlight / floodlight on pole

WHITE COB LED

→ symmetrical

3000K CRI>80
220-240V 0/50/60Hz ⊕



80W | 4140 lm (*)
spot 14°



80W | 7280 lm (*)
medium 26°

2200K / 2700K / 4000K
available on request



80W | 7600 lm (*)
large 60°

DALI dimmable

→ asymmetrical

→ street optic



79W | 5090 lm (*)
106° x 64°



76W | 6765 lm (*)
150° x 55°

RGBW LED

→ symmetrical

max. 900mA ⬡
4 channels +
1 channel NTC



80W
spot 24°



80W
medium 40°



80W
large 70°

(*) Real Data

Platek Srl
Registered Office: Via Paderno, 19
Head Office: Via Marrocco, 4
25050—Rodengo Saiano (BS),
Italy
P.Iva 03320290178
C.F. 03007130176

T +39 030 68 18 201
F +39 030 68 16 567
info@platek.eu
www.platek.eu

Art Direction
Gusto IDS
Platek

Graphic design
Gusto IDS
Platek

Photo
Metalli Photo Design
Ottavio Tomasini

© Platek 2020

Platek online
facebook.com/platek
twitter.com/platek
instagram.com/platek
youtube.com/platek

